

FEATURES

- ✧ High current capability, low forward voltage
- ✧ Excellent high temperature stability
- ✧ Low power loss, and high efficiency
- ✧ High forward surge capability
- ✧ For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications.
- ✧ RoHS compliant

MACHANICAL DATA

- ✧ Case: TO-220/TO-220F molded plastic package
- ✧ Terminal: Matte tin plated, solderable per MIL-STD-750, Method 2026
- ✧ Molding Compound Flammability Rating: UL94-0
- ✧ High temperature soldering guaranteed: 260°C/10second
- ✧ Polarity: As marked
- ✧ Mounting position: Any

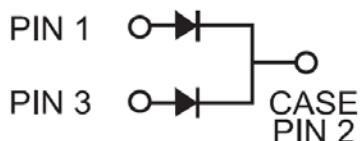
ORDERING INFORMATION

- ✧ Device:
GT40100CT
GT40100FCT
- ✧ Package: TO-220/TO-220F
- ✧ Marking: As marked
- ✧ Material: RoHS compliant
- ✧ Packing: Plastic tube
- ✧ Quantity per tube: 50pcs

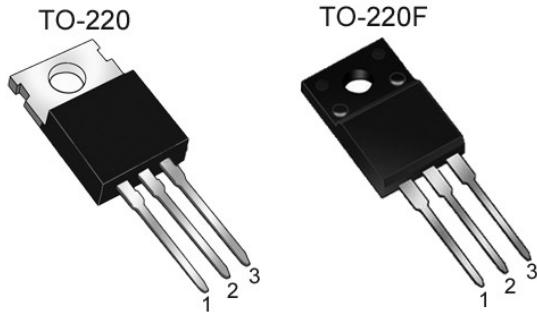
APPLICATIONS

- ✧ Switching mode power supply applications
- ✧ Portable equipment battery applications
- ✧ High frequency rectification
- ✧ DC/DC converter

PIN CONFIGURATION



PACKAGE OUTLINE

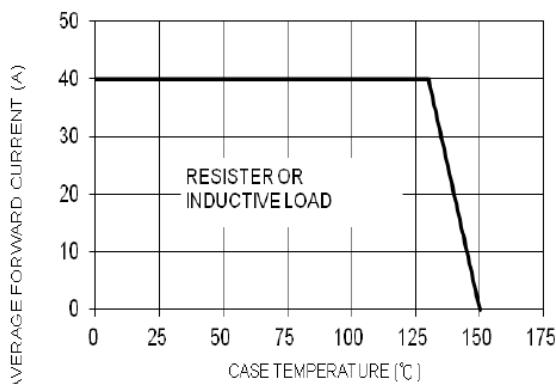
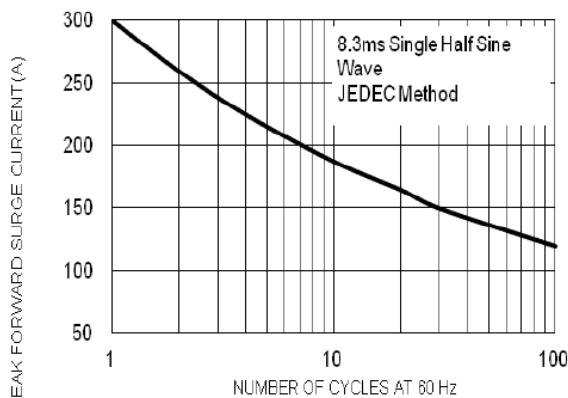
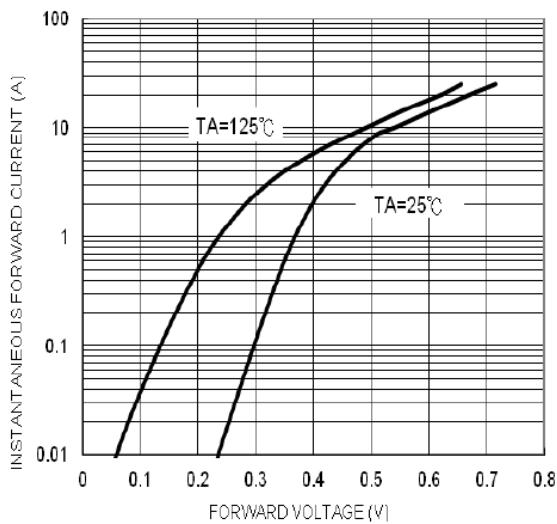
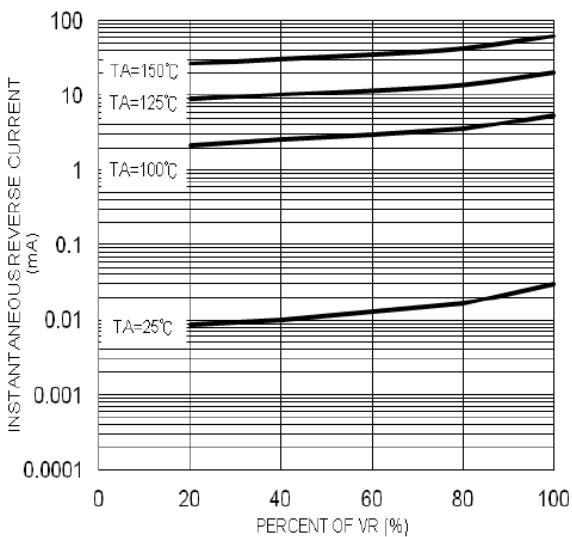


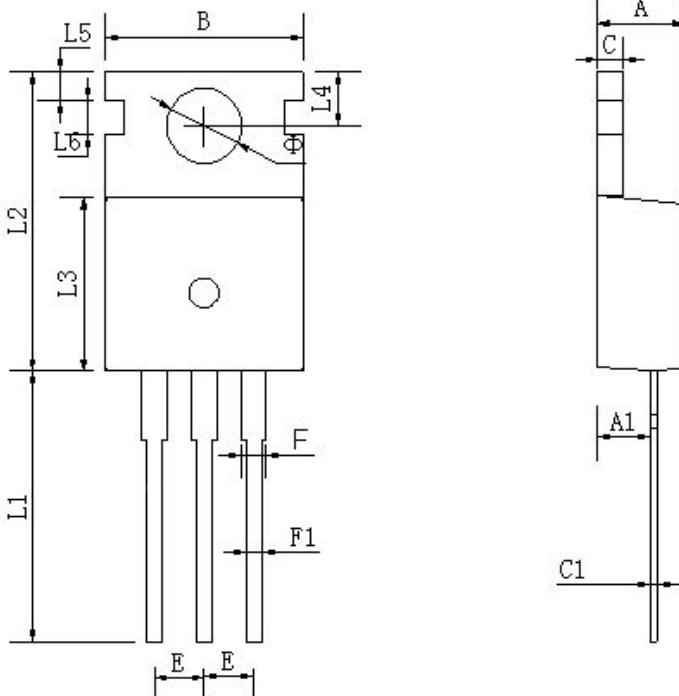
ABSOLUTE MAXIMUM RATING (Tamb=25°C, unless otherwise specified)

Symbol	Parameter	Value	Units
V _{RRM}	Repetitive Peak Reverse Voltage	100	V
I _{F(AV)}	Average Forward Current Total device Per Leg	40 20	A
I _{FSM}	Peak Forward Surge Current, 8.3ms single half sine-wave Per Leg	300	A
I _{RRM}	Peak Repetitive Reverse Current at tp=2 μs, 1 kHz	1.0	A
T _J & T _{STG}	Junction and Storage Temperature	-50~+150	°C

ELECTRICAL CHARACTERISTICS (Tamb=25°C, unless otherwise specified)

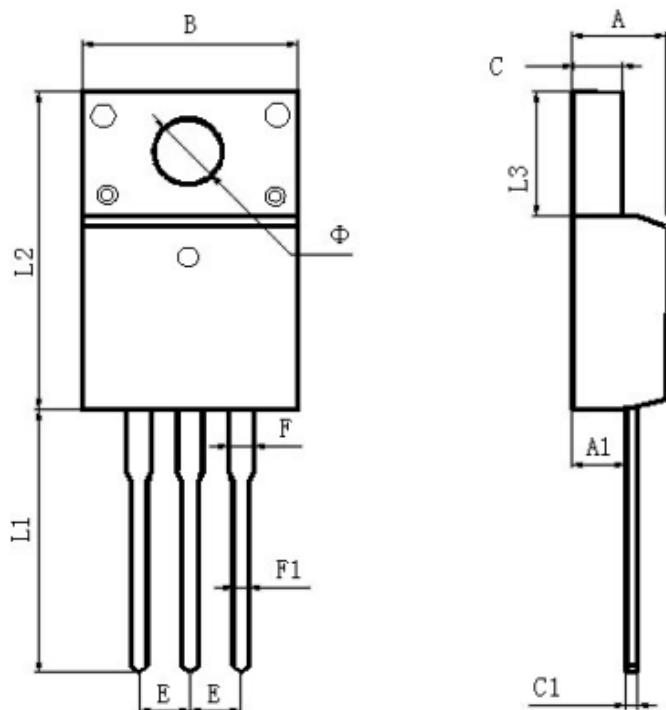
Symbol	Parameter	Test Condition	Min	Typ	Max	Units
V _F	Forward Voltage	I _F = 10A Ta=25°C		0.54		V
		I _F = 20A Ta=25°C		0.67	0.75	V
		I _F = 10A Ta=125°C		0.49		V
		I _F = 20A Ta=125°C		0.62	0.65	V
V _R	Reverse Breakdown Voltage	I _R = 0.5mA	100			V
I _R	Reverse Leakage Current	V _R = 100V Ta=25°C		30	200	μA
		V _R = 100V Ta=125°C		20	45	mA

ELECTRICAL CHARACTERISTICS CURVE
FIG.1 MAXIMUM FORWARD CURRENT DERATING CURVE

FIG. 2 MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT PER LEG

FIG. 3 TYPICAL FORWARD CHARACTERISTICS PER LEG

FIG. 4 TYPICAL REVERSE CHARACTERISTICS PER LEG


TO-220 PACKAGE OUTLINE DIMENSIONS


DIM	MIN	NOM	MAX
A	4.25	4.45	4.65
A1	2.47	2.67	2.87
B	9.86	10.16	10.46
C	1.22	1.27	1.37
C1	0.33	0.38	0.48
E	2.44	2.54	2.64
F	1.07	1.27	1.47
F1	0.7	0.8	0.9
L1	12.5	13.5	14.5
L2	14.94	15.24	15.54
L3	8.55	8.85	9.15
L4	2.54	2.74	2.94
L5	1.07	1.27	1.47
L6	1.45	1.65	1.85
Φ	3.64	3.84	4.04

Unit: mm

TO-220F PACKAGE OUTLINE DIMENSIONS


DIM	MIN	NOM	MAX
A	4.50	4.70	4.90
A1	2.56	2.76	2.96
B	9.86	10.16	10.46
C	2.34	2.54	2.74
C1	0.45	0.50	0.60
E	2.34	2.54	2.74
F	1.08	1.28	1.48
F1	0.7	0.8	0.9
L1	11.98	12.98	13.98
L2	15.57	15.87	16.17
L3	6.48	6.68	6.88
Φ	2.98	3.18	3.38

Unit: mm