

FEATURES

- ✧ Hyper fast recovery time
- ✧ Soft recovery characteristics
- ✧ Low forward voltage
- ✧ Low stored charge
- ✧ Low leakage current
- ✧ Low recovery loss
- ✧ High junction temperature
- ✧ Epitaxial planar construction

MACHANICAL DATA

- ✧ Case: DO-201AD(DO-27) outline plastic package
- ✧ Terminal: Matte tin plated, solderable per MIL-STD-750, Method 2026
- ✧ Molding Compound Flammability Rating:UL94-0
- ✧ High temperature soldering guaranteed:
260°C /10second

ORDERING INFORMATION

- ✧ Device: HFD10G60Z
- ✧ Package: DO-201AD(DO-27)
- ✧ Marking: As marked
- ✧ Material: RoHS compliant
- ✧ Packing: Tape & Ammo
- ✧ Quantity per box: 1,250pcs

APPLICATIONS

- ✧ Switching mode power supply
- ✧ Motor control
- ✧ Inverters, Converters
- ✧ Freewheeling, Snubber, PFC circuits
- ✧ Polarity protection

SYMBOL



PACKAGE OUTLINE





ABSOLUTE MAXIMUM RATING (Tamb=25°C, unless otherwise specified)

Symbol	Parameter	Value	Units
V_{RRM}	DC Blocking Voltage	600	V
$I_{F(AV)}$	Average Forward Current	10	A
I_{FSM}	Peak Forward Surge Current, 8.3ms single half sine-wave	80	A
T_J	Operating Junction Temperature	-55~+175	°C
T_{STG}	Storage Temperature	-55~+150	°C

ELECTRICAL CHARACTERISTICS (Tamb=25°C, unless otherwise specified)

Symbol	Parameter	Test Condition	Min	Typ	Max	Units
V_F	Forward Voltage	$I_F = 10A$ Ta=25°C		1.35	1.60	V
		$I_F = 10A$ Ta=125°C		1.25	1.50	V
V_R	Reverse Breakdown Voltage	$I_R = 50\mu A$	600			V
I_R	Reverse Leakage Current	$V_R = 600V$ Ta=25°C			2	μA
		$V_R = 600V$ Ta=125°C			50	μA
T_{rr}	Reverse Recovery Time	$I_F = 0.5A, I_R = 1A$ $I_{rr} = 0.25A$		26	30	ns

ELECTRICAL CHARACTERISTICS CURVE

Fig 1 Typical Forward Current Derating Curve

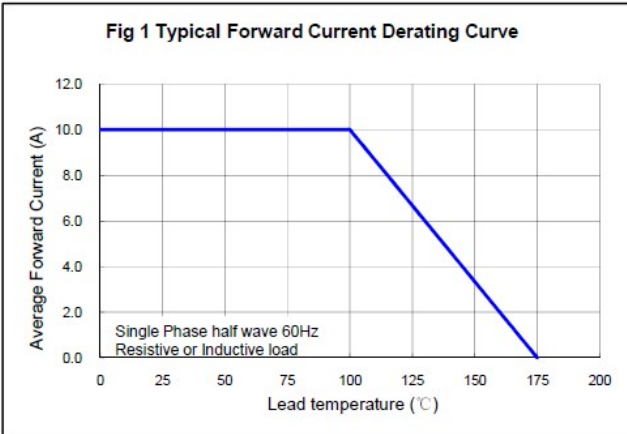


Fig 2 Max. Non-repetitive Forward Surge Current

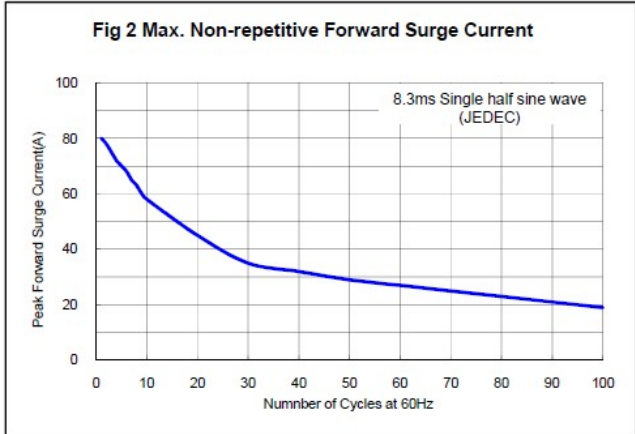


Fig 3 Typical Instantaneous Forward Characteristics



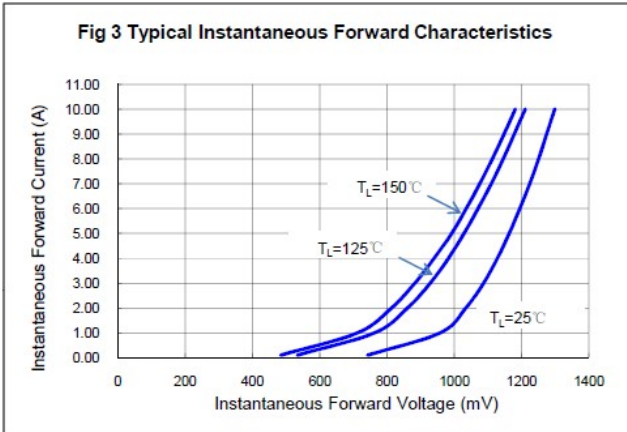


Fig 4 Typical Reverse Characteristics

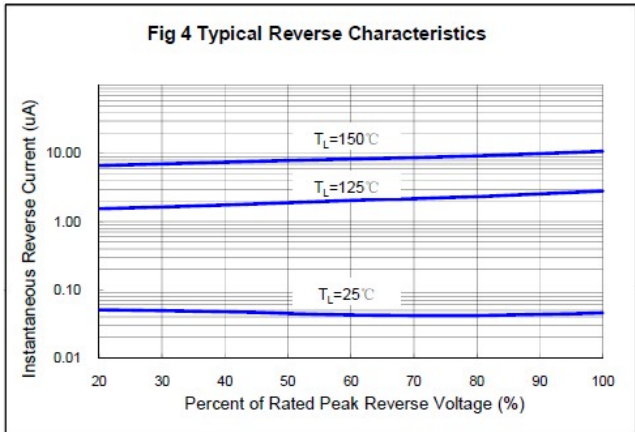

DO-201AD(DO-27) PACKAGE OUTLINE DIMENSIONS

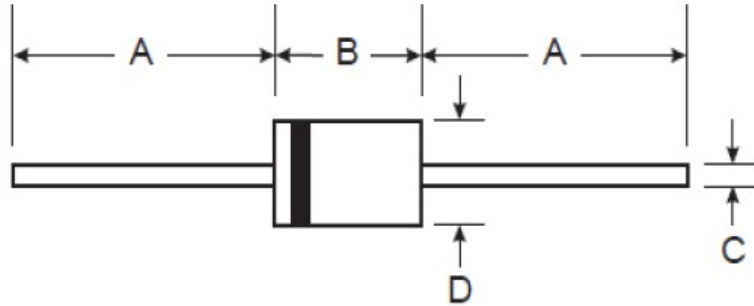

DO-201AD(DO-27) Plastic				
Dim	Min		Max	
	Inch	mm	Inch	mm
A	1.0	25.4	-	-
B	0.285	7.2	0.375	9.5
C	0.039	1.0	0.052	1.3
D	0.190	4.8	0.210	5.3